




Couterbalanced Electric Forklift Truck

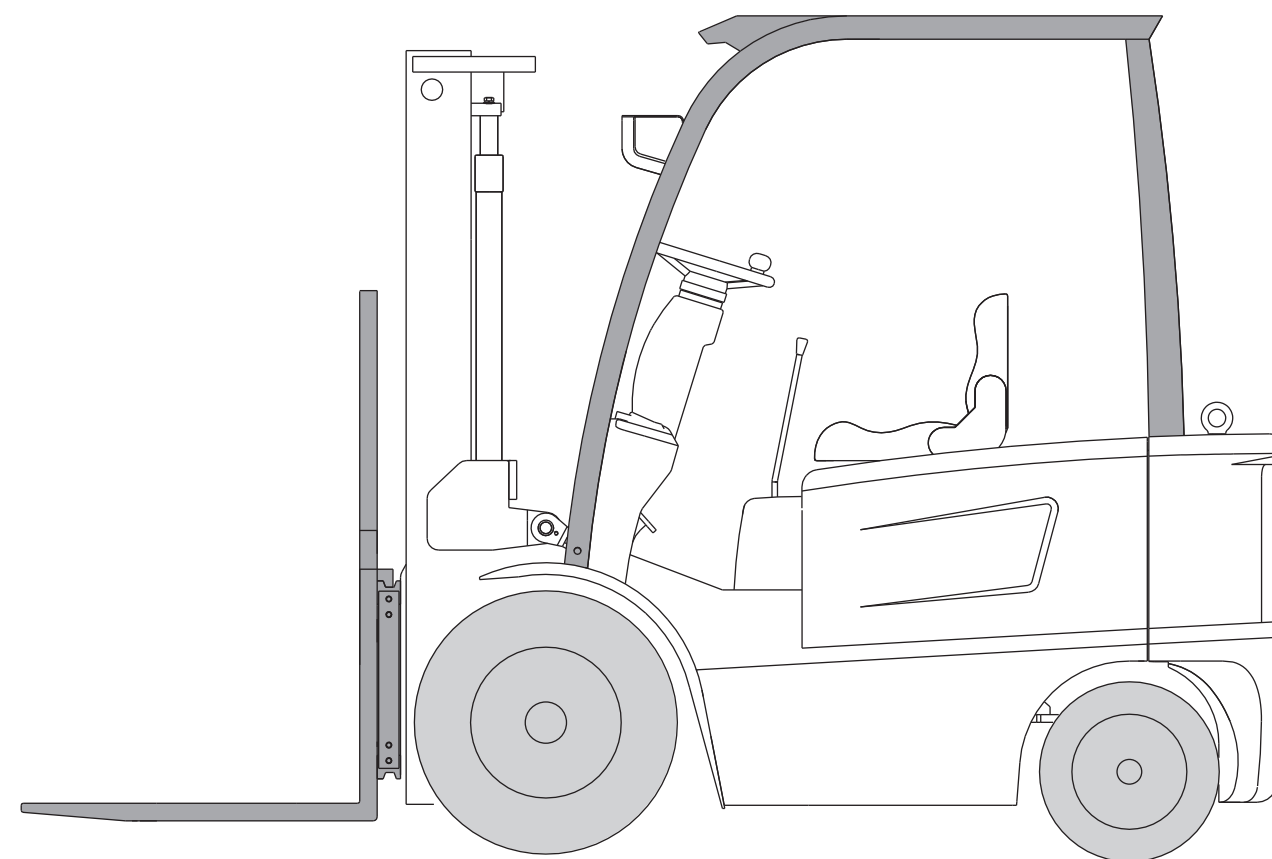

HANGZHOU ZHELI FORKLIFT GROUP CO.,LTD

Add: No.1 Xindeng Industrial Park, Fuyang City, Zhejiang
Province P.R.China

Tel: +86-571-86888355 / 86888377

Fax: +86-571-86888399

E-mail: sales@unforklift.com

Homepage: www.unforklift.com



UN.B0A00G/1




3-wheel Battery Forklift Trucks(1.3t / 1.6t)

MAIN SPECIFICATIONS


Specification	1	Manufacturer			1
	2	Model		FBT13-AZ1 FBT16-AZ1	2
	3	Rated Load Capacity	kg	1300 1600	3
	4	Load Centre	mm	500	4
	5	Rated Lift Height	mm	3000	5
	6	Free Lift Height	mm	120	6
	7	Fork Size	L W T	mm 920 120 35	7
	8	Tilting Angle	F/R (/)	Deg 6 /6	8
Dimensions	9	Overall Dimensions	Length (to Fork Face)	mm 1885 1955	9
	10		Width	mm 1082 1082	10
	11		Height when Mast Lowered	mm 2015 2015	11
	12		Height when Mast Lifted	mm 4040 4040	12
	13		Height to Safeguard	mm 2080 2080	13
	14	Turning Radius	Min.	mm 1515 1615	14
	15	Overhang		mm 354 354	15
	16	Tread (Front)		mm 922 922	16
	17	Tread (Rear)		mm 175	17
	18	Ground Clearance	Min.	mm 90	18
	19	Wheelbase		mm 1320 1420	19
	20	Fork Spread	Min./Max.	mm 200/1000	20
	21	Working Aisle Width with Pallet (Ast)*	1000 1200 Crossways	mm 3235 3335	21
	22		800 1200 Lengthways	mm 3335 3435	22
Performance	23	Speed	Travel (Full Load)	km/h 13	23
	24		Travel (No Load)	km/h 14	24
	25		Lifting (Full Load)	mm/s 300 290	25
	26		Lifting (No Load)	mm/s 450 440	26
	27	Gradeability	Full Load	% 18	27
	28		No Load	% 20	28
	29	Total Weight	Include Battery Box	kg 2820 3100	29
	30	Tyres	Front 2	18*7-8 18*7-8	30
Drive	31		Rear 2	15*4.5-8	31
	32	Motor	Drive Motor 2	kw 4*2	32
	33		Pump Motor	kw 11 11	33
	34	Battery	Standard	V/Ah 48/500 48/500	34
	35	Controller	Type	AC	35
	36		Manufacturer	ZAPI	36
	37	Operating Pressure for Attachment		Mpa 14.5	37

Specifications and characteristics are subject to change without notice.
Please contact us for detailed information.

UN Forklift retains the right to interpret.

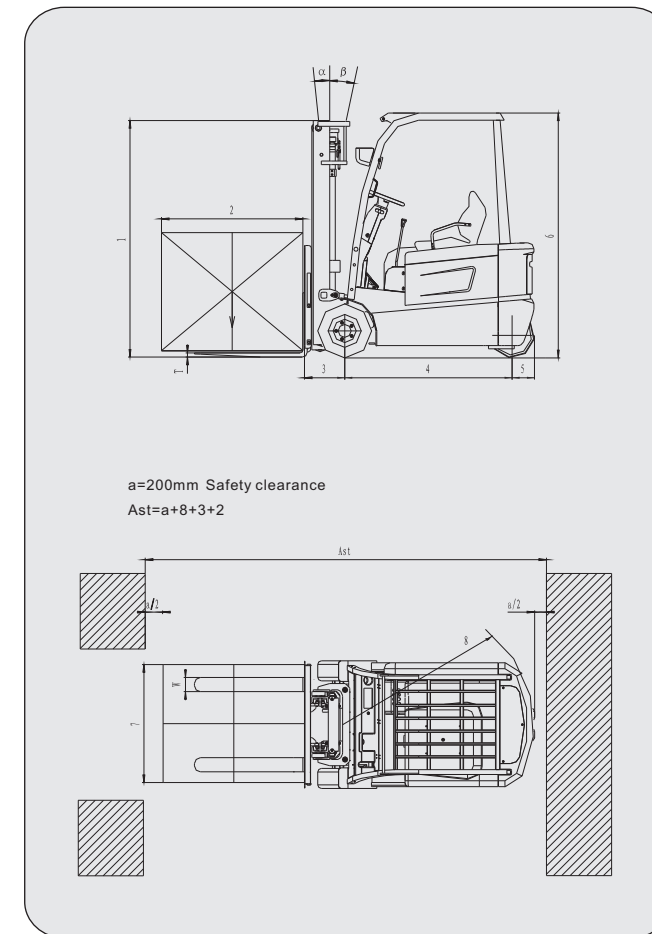

Load chart

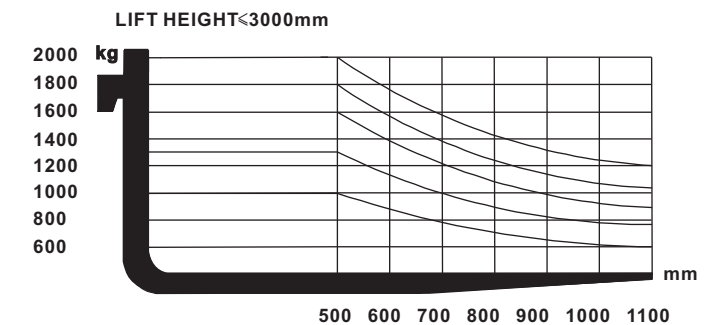

MAST SPECIFICATIONS & RATED CAPACITIES

Mast Type	Mast Name	Max. Fork Height (mm)	Load Capacity		Overall Height (mm)			Free Lift (mm)		Tilt Angle (F/R)	Total Weight (kg)		
					Lowered	Extended		Without Backrest	With Backrest				
			Load Centre 500mm (kg)			Without Backres	With Backrest						
			FBT13	FBT16							1.3t/1.6		1.3t/1.6t
Wide View Mast	SM250	2500	1300	1600	1765	2900		3540	120	120	6-6	2795	3075
	SM270	2700	1300	1600	1865	3190		3740	120	120	6-6	2805	3085
	SM300	3000	1300	1600	2015	3490		4040	120	120	6-6	2820	3100
	SM330	3300	1300	1600	2165	3790		4340	120	120	6-6	2835	3115
	SM350	3500	1300	1600	2265	3990		4540	120	120	6-6	2845	3125
	SM370	3700	1300	1600	2365	4190		4740	120	120	6-6	2855	3135
	SM400	4000	1300	1600	2565	4490		5040	120	120	3-5	2885	3165
	SM430	4300	1200	1500	2715	4790		5340	120	120	3-5	2895	3175
	SM450	4500	1100	1400	2815	4990		5540	120	120	3-5	2910	3190
2-stage Full Free Wide View Mast	SFM250	2500	1300	1600	1765	2900		3540	1330	760	6-6	2935	3215
	SFM270	2700	1300	1600	1865	3190		3740	1430	860	6-6	2950	3230
	SFM300	3000	1300	1600	2015	3490		4040	1580	1010	6-6	2965	3245
	SFM330	3300	1300	1600	2165	3790		4340	1730	1160	6-6	2980	3260
	SFM350	3500	1300	1600	2265	3990		4540	1830	1260	6-6	2990	3270
	SFM370	3700	1300	1600	2365	4190		4740	1930	1360	6-6	3000	3280
	SFM400	4000	1300	1600	2615	4490		5040	2180	1610	3-5	3010	3290
3-stage Full Free Wide View Mast	STFM430	4300	1200	1500	1965	4815		5340	1530	960	3-5	3105	3385
	STFM450	4500	1100	1400	2015	5015		5540	1580	1010	3-5	3115	3395
	STFM470	4700	1000	1300	2065	5215		5740	1630	1060	3-5	3130	3410
	STFM500	5000	950	1250	2165	5515		6040	1730	1160	3-5	3140	3420
	STFM550	5500	850	1150	2365	6015		6540	1930	1360	3-5	3165	3445
	STFM600	6000	750	1050	2633	6515		7040	2130	1560	3-5	3195	3475
	STFM650	6500	650	950	2783	7015		7540	2280	1710	3-5	3225	3505

NOTE: With side shifter, load capacity subtract 150Kg.




3-wheel Battery Forklift Trucks(1.8t / 2.0t)

MAIN SPECIFICATIONS


Specification	1	Manufacturer			1
	2	Model		FBT18-AZ1 FBT20-AZ1	2
	3	Rated Load Capacity	kg	1800 2000	3
	4	Load Centre	mm	500	4
	5	Rated Lift Height	mm	3000	5
	6	Free Lift Height	mm	120	6
	7	Fork Size	L W T	mm 920 120 35	7
	8	Tilting Angle	F/R (/)	Deg 6 / 6	8
Dimensions	9	Overall Dimensions	Length (to Fork Face)	mm 1955	9
	10		Width	mm 1082	10
	11		Height when Mast Lowered	mm 2015	11
	12		Height when Mast Lifted	mm 4160	12
	13		Height to Safeguard	mm 2080	13
	14	Turning Radius	Min.	mm 1615	14
	15	Overhang		mm 354	15
	16	Tread (Front)		mm 922	16
	17	Tread (Rear)		mm 175	17
	18	Ground Clearance	Min.	mm 90	18
	19	Wheelbase		mm 1420	19
	20	Fork Spread	Min./Max.	mm 200/1000	20
	21	Working Aisle Width with Pallet (Ast)*	1000 1200 Crossways	mm 3335	21
	22		800 1200 Lengthways	mm 3435	22
Performance	23	Speed	Travel (Full Load)	km/h 13	23
	24		Travel (No Load)	km/h 14	24
	25		Lifting (Full Load)	mm/s 270	25
	26		Lifting (No Load)	mm/s 430	26
	27	Gradeability	Full Load	% 18	27
	28		No Load	% 20	28
	29	Total Weight	Include Battery Box	kg 3180	29
	30	Tyres	Front 2	18*7-8	30
	31		Rear 2	15*4.5-8	31
Drive	32	Motor	Drive Motor 2	kw 4*2	32
	33		Pump Motor	kw 11	33
	34	Battery	Standard	V/Ah 48/500	34
	35	Controller	Type	AC	35
	36		Manufacturer	ZAPI	36
	37	Operating Pressure for Attachment		Mpa 14.5	37

Specifications and characteristics are subject to change without notice.
Please contact us for detailed information.

UN Forklift retains the right to interpret.

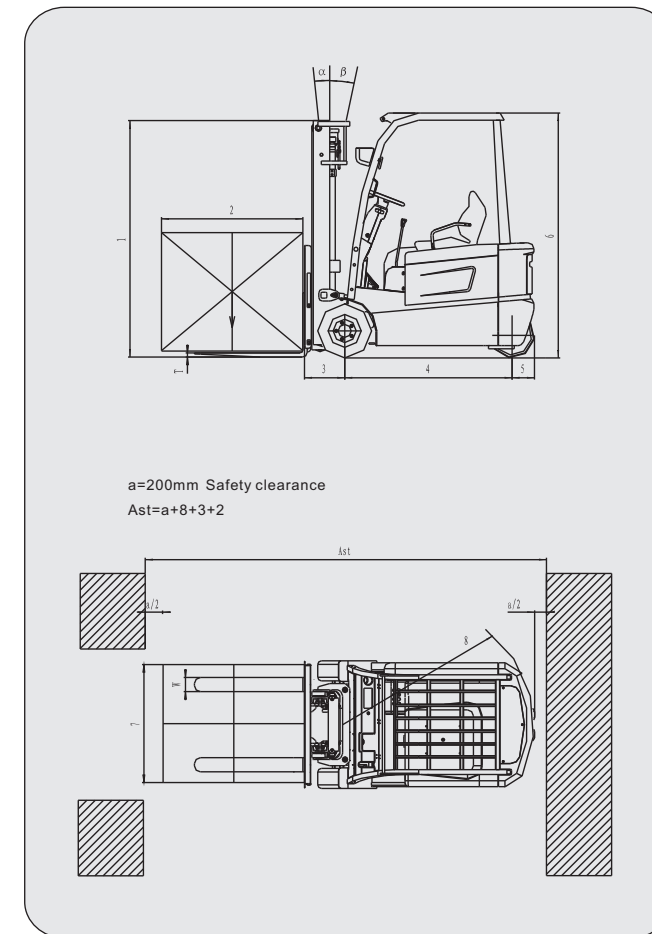

Load chart

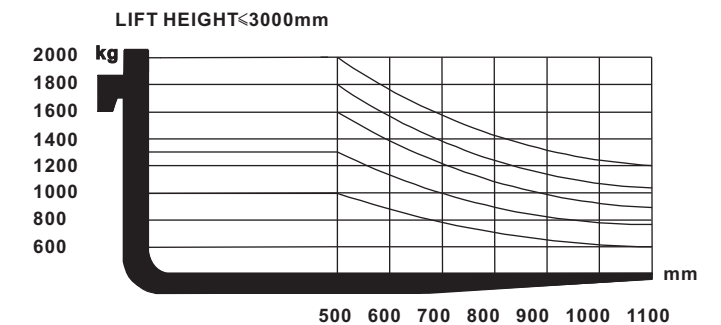

MAST SPECIFICATIONS & RATED CAPACITIES

Mast Type	Mast Name	Max. Fork Height (mm)	Load Capacity (Load Centre 500mm) (kg)		Lowered	Overall Height (mm)		Free Lift (mm)		Tilt Angle (F/R)	Total Weight (kg)	
						Extended		Without Backrest	With Backrest			
						Without Backrest	With Backrest					
			FBT18	FBT20			1.8t/2.0t		1.8t/2.0t		FBT18	FBT20
Wide View Mast	SM250	2500	1800	2000	1765	3035	3660	120	120	6-6	3155	3310
	SM270	2700	1800	2000	1865	3235	3860	120	120	6-6	3165	3325
	SM300	3000	1800	2000	2015	3535	4160	120	120	6-6	3180	3345
	SM330	3300	1800	2000	2165	3835	4460	120	120	6-6	3195	3365
	SM350	3500	1800	2000	2265	4035	4660	120	120	6-6	3205	3380
	SM370	3700	1800	2000	2365	4235	4860	120	120	6-6	3215	3395
	SM400	4000	1800	2000	2565	4535	5160	120	120	3-5	3245	3420
	SM430	4300	1700	1900	2715	4835	5460	120	120	3-5	3255	3440
SM450	4500	1600	1800	2815	5035	5660	120	120	3-5	3270	3455	
2-stage Full Free Wide View Mast	SFM250	2500	1800	2000	1765	3035	3660	1230	605	6-6	3295	3485
	SFM270	2700	1800	2000	1865	3235	3860	1330	705	6-6	3310	3500
	SFM300	3000	1800	2000	2015	3535	4160	1480	855	6-6	3325	3520
	SFM330	3300	1800	2000	2165	3835	4460	1630	1005	6-6	3340	3540
	SFM350	3500	1800	2000	2265	4035	4660	1730	1105	6-6	3350	3555
	SFM370	3700	1800	2000	2365	4235	4860	1830	1205	6-6	3360	3570
	SFM400	4000	1800	2000	2615	4535	5160	2080	1455	3-5	3380	3590
3-stage Full Free Wide View Mast	STFM430	4300	1700	1900	1965	4835	5460	1430	805	3-5	3465	3655
	STFM450	4500	1600	1800	2015	5035	5660	1480	855	3-5	3475	3670
	STFM470	4700	1500	1550	2065	5235	5860	1530	905	3-5	3490	3685
	STFM500	5000	1450	1500	2165	5535	6160	1630	1005	3-5	3500	3705
	STFM550	5500	1200	1300	2365	6035	6660	1830	1205	3-5	3525	3735
	STFM600	6000	1100	1200	2633	6535	7160	2030	1405	3-5	3555	3765
	STFM650	6500	1000	1100	2783	7035	7560	2180	1555	3-5	3580	3795

NOTE: With side shifter, load capacity subtract 150Kg.




4-wheel Battery Forklift Trucks(1.0t / 1.5t)

MAIN SPECIFICATIONS


Specification	1	Manufacturer					1
	2	Model			FB10-FAZ1FB15-FAZ1		2
	3	Rated Load Capacity		kg	1000	1500	3
	4	Load Centre		mm	500		4
	5	Rated Lift Height		mm	3000		5
	6	Free Lift Height		mm	135	135	6
	7	Fork Size	L W T	mm	920 120 35	920 120 35	7
	8	Tilting Angle	F/R (/)	Deg	6 /12		8
Dimensions	9	Overall Dimensions	Length (to Fork Face)	mm	2140	2160	9
	10		Width	mm	1090	1090	10
	11		Height when Mast Lowered	mm	2015	2015	11
	12		Height when Mast Lifted	mm	4030	4030	12
	13		Height to Safeguard	mm	2125	2125	13
	14	Turning Radius	Min.	mm	1950	1980	14
	15	Overhang		mm	405	405	15
	16	Tread (Front)		mm	890	890	16
	17	Tread (Rear)		mm	920	920	17
	18	Ground Clearance	Min.	mm	110	110	18
	19	Wheelbase		mm	1380	1380	19
	20	Fork Spread	Min./Max.	mm	240/970	240/970	20
21	Working Aisle Width	1000 1200 Crossways	mm	3570	3570	21	
22	with Pallet (Ast)*	800 1200 Lengthways	mm	3670	3670	22	
Performance	23	Speed	Travel (Full Load)	km/h	12		23
	24		Travel (No Load)	km/h	13		24
	25		Lifting (Full Load)	mm/s	280	280	25
	26		Lifting (No Load)	mm/s	380	380	26
	27	Gradeability	Full Load	%	18		27
	28		No Load	%	20		28
	29	Total Weight	Include BatteryBox	kg	2890	3050	29
	30	Tyres	Front 2		6.50-10-10PR	6.50-10-10PR	30
	31		Rear 2		5.00-8-8PR	5.00-8-8PR	31
Drive	32	Motor	Drive Motor	kw	7.5	7.5	32
	33		Pump Motor	kw	9.2	9.2	33
	34	Battery	Standard	V/Ah	48/465	48/465	34
	35	Controller	Type		AC		35
	36		Manufacturer		ZAPI		36
	37	Operating Pressure for Attachment		Mpa	14.5	14.5	37

Specifications and characteristics are subject to change without notice.
Please contact us for detailed information.

UN Forklift retains the right to interpret.

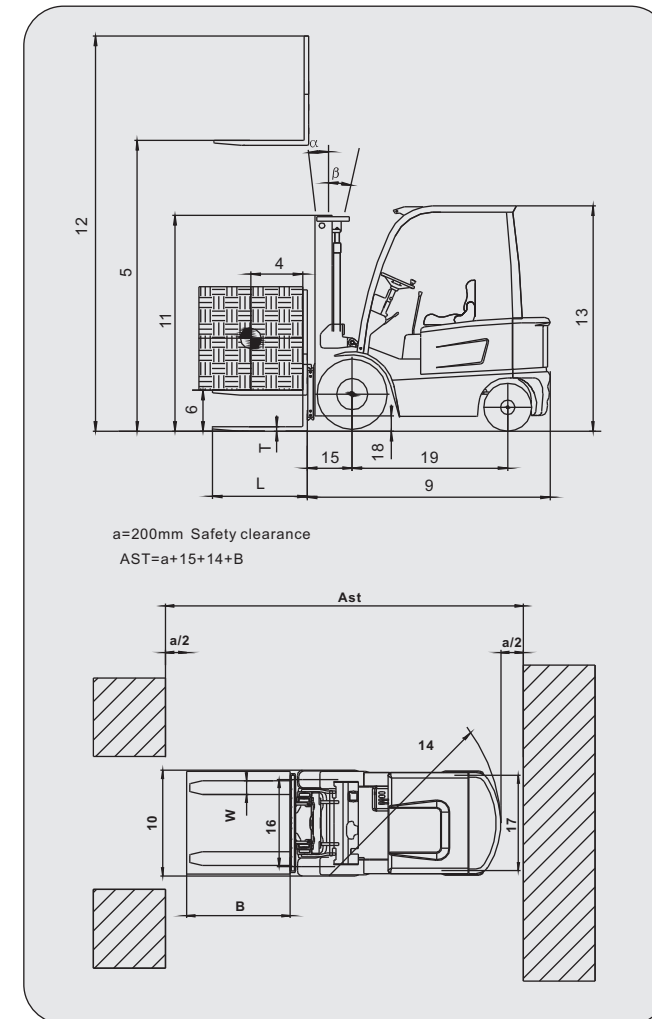

Load chart

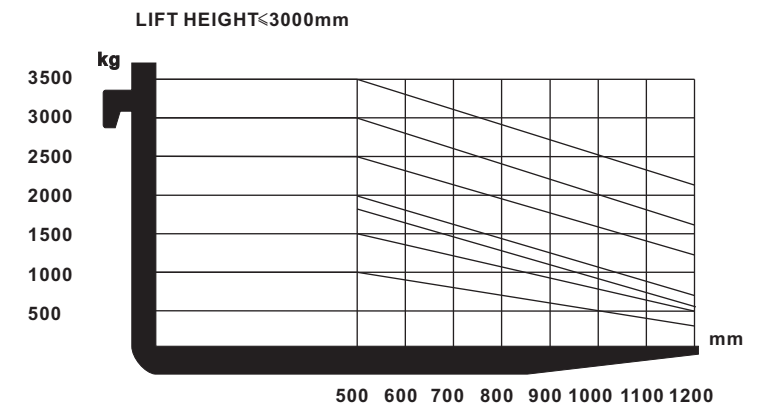

MAST SPECIFICATIONS & RATED CAPACITIES

Mast Type	Mast Name	Max. Fork Height (mm)	Load Capacity (Load Centre 500mm) (kg)		Overall Height(mm)			Free Lift (mm)		Tilt Angle (F/R)	Total Weight (kg)	
					Lowered	Extended		Without Backrest With Bracket				
			FB10	FB15		1.0t/1.5t					1.0t/1.5t	
Wide View Mast	BM200	2000	1000	1500	1515	2510	3030	135	135	6-12	2810	2970
	BM250	2500	1000	1500	1765	3010	3530	135	135	6-12	2850	3010
	BM300	3000	1000	1500	2015	3510	4030	135	135	6-12	2890	3050
	BM330	3300	1000	1500	2165	3810	4330	135	135	6-12	2920	3080
	BM350	3500	1000	1500	2265	4010	4530	135	135	6-12	2950	3110
	BM370	3700	1000	1500	2365	4210	4730	135	135	6-6	2970	3130
	BM400	4000	1000	1500	2565	4510	5030	135	135	6-6	3000	3160
	BM430	4300	950	1300	2690	4760	5280	135	135	6-6	3030	3190
	BM450	4500	900	1250	2815	5010	5530	135	135	6-6	3050	3210
	BM470	4700	890	1100	2915	5210	5730	135	135	6-6	3070	3230
	BM500	5000	880	950	3115	5510	6030	135	135	6-6	3100	3260
	BM550	5500	700	800	3365	6010	6530	135	135	3-6	3135	3295
BM600	6000	500	500	3615	6510	7030	135	135	3-6	3180	3340	
2-stage Full Free Wide View Mast	BFM250	2500	1000	1500	1765	3015	3585	1335	775	6-12	2870	3040
	BFM300	3000	1000	1500	2015	3515	4085	1585	1025	6-12	2930	3090
	BFM330	3300	1000	1500	2165	3815	4385	1735	1175	6-12	2950	3110
	BFM350	3500	1000	1500	2265	4015	4585	1835	1275	6-12	2970	3125
	BFM370	3700	1000	1500	2365	4215	4785	1935	1375	6-6	2980	3150
	BFM400	4000	1000	1500	2565	4515	5085	2135	1575	6-6	3000	3180
3-stage Full Free Wide View Mast	BTFM400	4000	1000	1350	1865	4860	5330	1345	775	6-6	3075	3235
	BTFM430	4350	850	1250	1965	4910	5380	1435	875	6-6	3100	3250
	BTFM450	4500	850	1200	2065	5060	5530	1535	975	6-6	3120	3260
	BTFM470	4700	830	1180	2115	5260	5730	1585	1025	6-6	3160	3290
	BTFM500	5000	800	900	2215	5560	6030	1682	1125	6-6	3200	3350
	BTFM550	5500	650	800	2385	5960	6430	1855	1295	3-6	3240	3390
	BTFM600	6000	500	600	2615	6560	7030	2085	1525	3-6	3270	3420
	BTFM650	6500	300	400	2865	6810	7280	2285	1755	3-6	3310	3460

NOTE: With side shifter, load capacity subtract 150Kg.





4-wheel Battery Forklift Trucks(2.0t / 2.5t)

MAIN SPECIFICATIONS

Specification	1	Manufacturer					1
	2	Model			FB20-FAZ1	FB25-FAZ1	2
	3	Rated Load Capacity		kg	2000	2500	3
	4	Load Centre		mm	500		4
	5	Rated Lift Height		mm	3000		5
	6	Free Lift Height		mm	140	140	6
	7	Fork Size	L W T	mm	1070 125 40	1070 125 40	7
	8	Tilting Angle	F/R (/)	Deg	6 /12		8
Dimensions	9	Overall Dimensions	Length (to Fork Face)	mm	2345	2345	9
	10		Width	mm	1150	1150	10
	11		Height when Mast Lowered	mm	2045	2045	11
	12		Height when Mast Lifted	mm	4145	4145	12
	13		Height to Safeguard	mm	2125	2125	13
	14	Turning Radius	Min.	mm	2075	2075	14
	15	Overhang		mm	473	473	15
	16	Tread (Front)		mm	970	970	16
	17	Tread (Rear)		mm	950	950	17
	18	Ground Clearance	Min.	mm	120	120	18
	19	Wheelbase		mm	1500	1500	19
	20	Fork Spread	Min./Max.	mm	250/1040	250/1040	20
	21	Working Aisle Width with Pallet (Ast)*	1000 1200 Crossways	mm	3925	3925	21
	22		800 1200 Lengthways	mm	4025	4025	22
Performance	23	Speed	Travel(Full Load)	km/h	12		23
	24		Travel(No Load)	km/h	13		24
	25		Lifting (Full Load)	mm/s	300	300	25
	26		Lifting (No Load)	mm/s	420	420	26
	27	Gradeability	Full Load	%	18		27
	28		No Load	%	20		28
	29	Total Weight	Include Battery Box	kg	4160	4360	29
	30	Tyres	Front 2		7.00-12-12PR	7.00-12-12PR	30
	31		Rear 2		18 7-8-14PR	18 7-8-14PR	31
Drive	32	Motor	Drive Motor	kw	11	11	32
	33		Pump Motor	kw	11	11	33
	34	Battery	Standard	V/Ah	48/620	48/620	34
	35	Controller	Type		AC		35
	36		Manufacturer		ZAPI		36
	37	Operating Pressure for Attachment		Mpa	17.5	17.5	37

Specifications and characteristics are subject to change without notice. UN Forklift retains the right to interpret. Please contact us for detailed information.

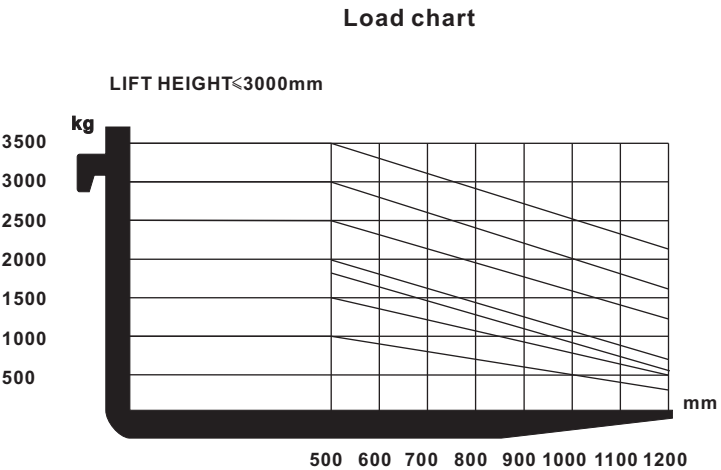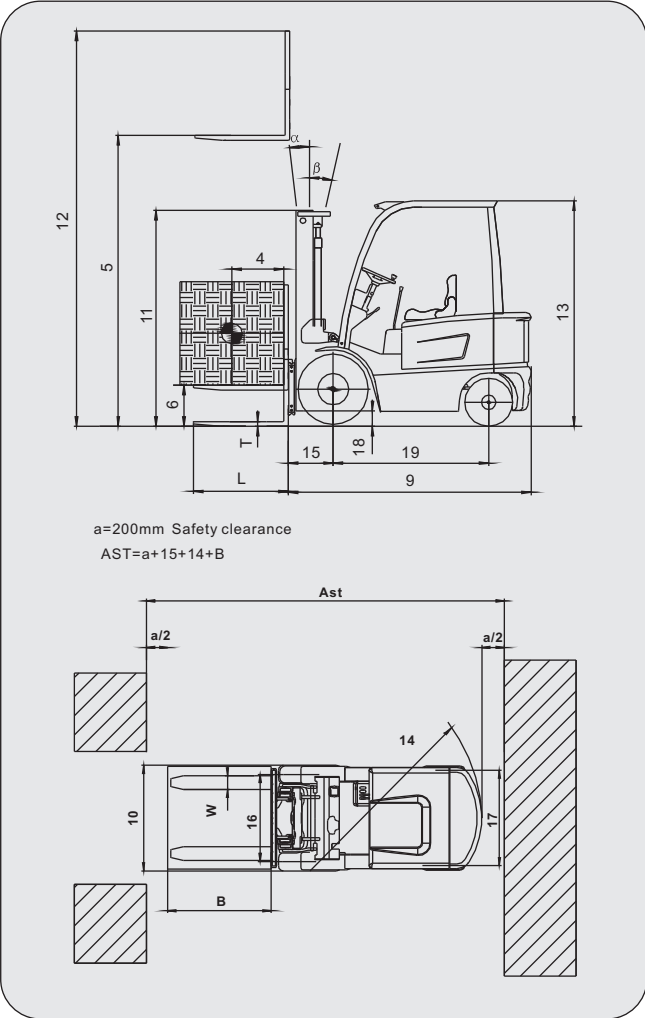

MAST SPECIFICATIONS & RATED CAPACITIES

Mast Type	Mast Name	Max. Fork Height (mm)	Load Capacity (Load Centre 500mm) (kg)		Overall Height(mm)			Free Lift (mm)		Tilt Angle (F/R)	Total Weight (kg)	
					Lowered	Extended		Without Backrest	With Backrest			
			FB20	FB25		2.0t/2.5t					2.0t/2.5t	
Wide View Mast	BM200	2000	2000	2500	1545	2585	3145	140	140	6-12	4080	4280
	BM250	2500	2000	2500	1795	3085	3645	140	140	6-12	4120	4330
	BM300	3000	2000	2500	2045	3585	4145	140	140	6-12	4160	4360
	BM330	3300	2000	2500	2195	3885	4445	140	140	6-12	4185	4395
	BM350	3500	2000	2500	2295	4085	4645	140	140	6-12	4200	4400
	BM370	3700	2000	2450	2395	4285	4865	140	140	6-6	4210	4415
	BM400	4000	2000	2400	2595	4585	5145	140	140	6-6	4240	4445
	BM430	4300	1850	2250	2720	4835	5395	140	140	6-6	4260	4470
	BM450	4500	1800	2150	2840	5085	5645	140	140	6-6	4280	4500
	BM470	4700	1700	1900	2940	5285	5745	140	140	6-6	4300	4520
	BM500	5000	1600	1600	3145	5585	6145	140	140	6-6	4320	4540
	BM550	5500	1500	1500	3395	6085	6645	140	140	3-6	4360	4590
BM600	6000	950	950	3645	6585	7145	140	140	3-6	4400	4640	
2-stage Full Free Wide View Mast	BFM250	2500	2000	2500	1795	3095	3660	1265	680	6-12	4170	4335
	BFM300	3000	2000	2500	2045	3595	4160	1515	930	6-12	4200	4375
	BFM330	3300	2000	2500	2195	3895	4460	1665	1080	6-12	4225	4395
	BFM350	3500	2000	2500	2295	4095	4660	1765	1180	6-12	4240	4410
	BFM370	3700	2000	2450	2395	4295	4860	1865	1285	6-6	4255	4430
	BFM400	4000	2000	2400	2595	4595	5160	2065	1480	6-6	4280	4465
3-stage Full Free Wide View Mast	BTFM400	4000	1900	2300	1910	4770	5330	1425	785	6-6	4300	4630
	BTFM430	4350	1850	2200	2010	4950	5510	1525	885	6-6	4310	4650
	BTFM450	4500	1750	2100	2120	5100	5660	1625	985	6-6	4340	4670
	BTFM470	4700	1720	2000	2160	5300	5860	1675	1030	6-6	4380	4710
	BTFM500	5000	1600	1600	2260	5600	6160	1775	1130	6-6	4400	4740
	BTFM550	5500	1500	1500	2440	6000	6560	1955	1305	3-6	4440	4770
	BTFM600	6000	950	950	2660	6600	7160	2175	1530	3-6	4480	4810
	BTFM650	6500	600	600	2810	7100	7660	2355	1750	3-6	4510	4840

NOTE: With side shifter, load capacity subtract 200Kg.


4-wheel Battery Forklift Trucks(3.0T / 3.5T)

MAIN SPECIFICATIONS


Specification	1	Manufacturer					1
	2	Model			FB30-FAZ1	FB35-FAZ1	2
	3	Rated Load Capacity		kg	3000	3500	3
	4	Load Centre		mm	500	500	4
	5	Rated Lift Height		mm	3000	3000	5
	6	Free Lift Height		mm	145	145	6
	7	Fork Size	L W T	mm	1070 125 45	1070 125 45	7
	8	Tilting Angle	F/R (/)	Deg	6 /12	6 /12	8
Dimensions	9	Overall Dimensions	Length (to Fork Face)	mm	2525	2585	9
	10		Width	mm	1225	1225	10
	11		Height when Mast Lowered	mm	2060	2060	11
	12		Height when Mast Lifted	mm	4160	4160	12
	13		Height to Safeguard	mm	2125	2125	13
	14	Turning Radius	Min.	mm	2260	2320	14
	15	Overhang		mm	478	478	15
	16	Tread (Front)		mm	1000	1000	16
	17	Tread (Rear)		mm	970	970	17
	18	Ground Clearance	Min.	mm	130	130	18
	19	Wheelbase		mm	1600	1600	19
	20	Fork Spread	Min./Max.	mm	250/1100	250/1100	20
	21	Working Aisle Width	1000 1200 Crossways	mm	4080	4140	21
22	with Pallet (Ast)*	800 1200 Lengthways	mm	4180	4240	22	
Performance	23	Speed	Travel (Full Load)	km/h	12	12	23
	24		Travel (No Load)	km/h	13	13	24
	25		Lifting (Full Load)	mm/s	280	280	25
	26		Lifting (No Load)	mm/s	440	440	26
	27	Gradeability	Full Load	%	16	12	27
	28		No Load	%	18	13	28
	29	Total Weight	Include Battery Box	kg	5150	5550	29
	30	Tyres	Front 2		28 9-15-12PR	28 9-15-12PR	30
	31		Rear 2		18 7-8-14PR	18 7-8-14PR	31
Drive	32	Motor	Drive Motor	kw	12	12	32
	33		Pump Motor	kw	12	12	33
	34	Battery	Standard	V/Ah	80/500	80/500	34
	35	Controller	Type		AC	AC	35
	36		Manufacturer		ZAPI	ZAPI	36
	37	Operating Pressure for Attachment		Mpa	17.5	17.5	37

Specifications and characteristics are subject to change without notice.
Please contact us for detailed information.

UN Forklift retains the right to interpret.

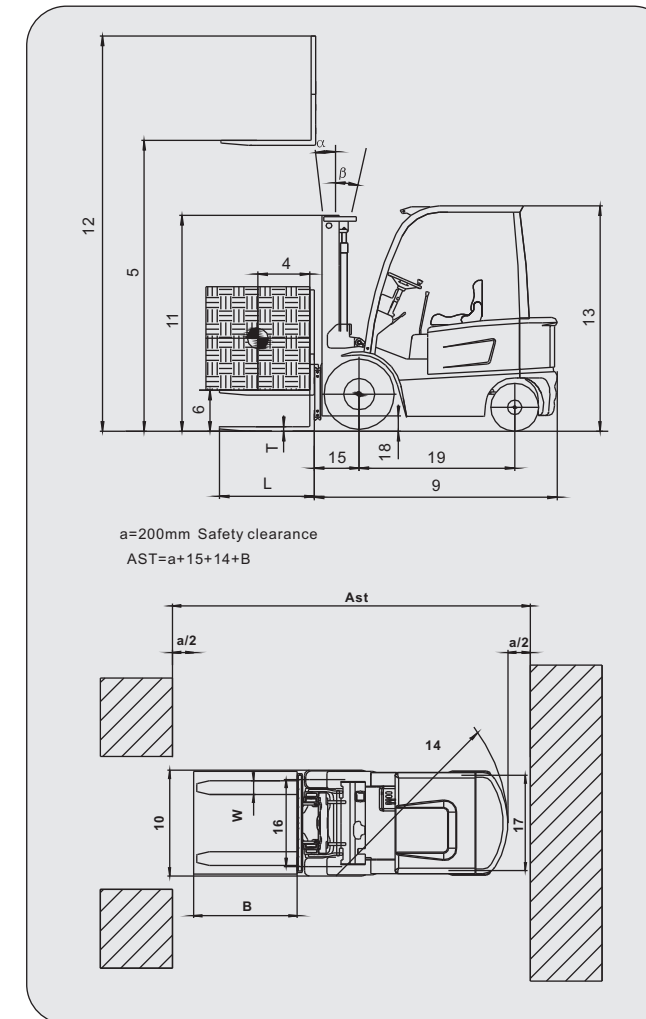

Load chart

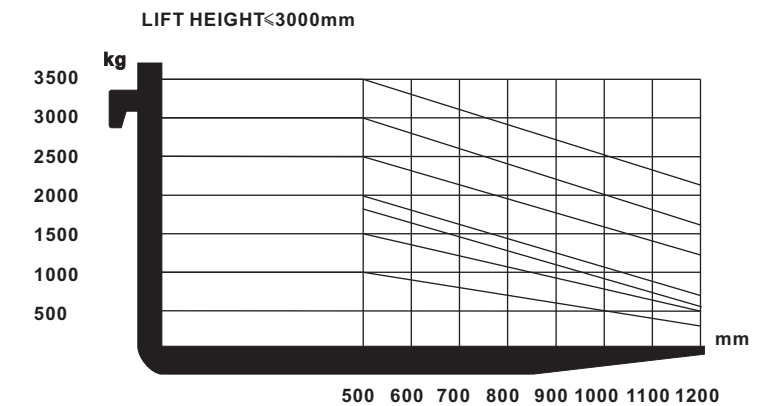

MAST SPECIFICATIONS & RATED CAPACITIES

Mast Type	Mast Name	Max. Fork Height (mm)	Load Capacity (Load Centre 500mm) (kg)		Overall Height (mm)			Free Lift (mm)		Tilt Angle (F/R)	Total Weight (kg)	
					Lowered	Extended		Without Backrest				
			Without Backrest			With Bracket						
			FB30	FB35		3.0t/3.5t			3.0t/3.5t			
Wide View Mast	BM200	2000	3000	3500	1560	2680	3160	145	145	6-12	5080	5500
	BM250	2500	3000	3500	1810	3180	3660	145	145	6-12	5110	5530
	BM300	3000	3000	3500	2060	3680	4160	145	145	6-12	5150	5570
	BM330	3300	3000	3500	2210	3980	4460	145	145	6-12	5170	5590
	BM350	3500	3000	3500	2310	4180	4660	145	145	6-12	5190	5610
	BM370	3700	3000	3500	2410	4380	4860	145	145	6-6	5210	5630
	BM400	4000	3000	3500	2610	4680	5160	145	145	6-6	5240	5660
	BM430	4300	2800	3300	2735	4930	5410	145	145	6-6	5260	5680
	BM450	4500	2700	3200	2860	5180	5660	145	145	6-6	5280	5700
	BM470	4700	2500	3000	2960	5380	5860	145	145	6-6	5300	5720
	BM500	5000	2200	2700	3160	5680	6160	145	145	6-6	5320	5740
BM550	5500	2000	2500	3410	6180	6660	145	145	3-6	5360	5780	
BM600	6000	1300	1800	3660	6680	7160	145	145	3-6	5400	5820	
2-stage Full Free Wide View Mast	BFM250	2500	3000	3500	1810	3190	3675	1175	695	6-12	5180	5620
	BFM300	3000	3000	3500	2060	3690	4175	1425	945	6-12	5220	5660
	BFM330	3300	3000	3500	2210	3990	4475	1575	1095	6-12	5240	5680
	BFM350	3500	3000	3500	2310	4190	4675	1675	1195	6-12	5260	5700
	BFM370	3700	3000	3500	2410	4390	4875	1775	1295	6-6	5280	5720
	BFM400	4000	3000	3500	2610	4690	5175	1975	1495	6-6	5310	5750
3-stage Full Free Wide View Mast	BTFM400	4000	2800	3300	1925	4870	5350	1440	795	6-6	5260	5680
	BTFM430	4350	2700	3200	2025	5045	5525	1540	895	6-6	5280	5700
	BTFM450	4500	2600	3100	2135	5195	5675	1640	995	6-6	5320	5740
	BTFM470	4700	2500	3000	2175	5395	5875	1690	1045	6-6	5360	5780
	BTFM500	5000	2100	2600	2275	5695	6175	1790	1145	6-6	5400	5820
	BTFM550	5500	2000	2500	2455	6095	6575	1970	1325	3-6	5420	5840
	BTFM600	6000	1300	1800	2675	6695	7172	2190	1545	3-6	5460	5880
	BTFM650	6500	900	1400	2825	7195	7672	2410	1695	3-6	5480	5900

NOTE: With side shifter, load capacity subtract 200Kg.

3-wheel Battery Forklift Trucks

Standard:

- Hoppecke Battery
- ZAPI Controller
- Full AC System
- PMP Gear Box
- SHIMADZU Multi-way Valve Control
- Double Drive Motor
- Pump Motor
- 2-Stage 3m Wide View Mast
- Bar Type Forks
- Load Backrest
- Multi-Functional Safe Seat
- Seat Sensor
- Front & Rear Solid Tyres
- 2nd Pipe & Valve
- NOK Hydraulic Seals
- Rearview Mirror
- Buzzer
- Electronic Horn
- Multi-Functional Combined Switch
- Emergency Switch
- Reverse Alarming Light
- Front Combined Lamp
- Rear Combined Lamp
- ZAPI-SMART Display Meter
- UN Label
- Integral Covering
- Adjustable Steering Wheel
- Cup Holder
- Luxurious Floor Mat
- Cover Lock
- Excellent Water-Proof Components
- Excellent Dust-Proof Components
- Mast Intelligent Buffering System
- Self Diagnose Indicator
- Side-way Battery Change
- Regenerative Braking System
- Swerve & Speed Proportion Control Device
- Acceleration Curve Memory Function
- Tool Box
- Operation Manual
- Maintenance Manual
- Spare Parts Manual
- Inspection Certificate

Options:

- 2-stage Full Free Wide View Mast
- 3-stage Full Free Wide View Mast
- No-marking Solid Tyre
- Fork Extensions
- Extended Forks
- 3rd Valve & Pipe
- 4th Valve & Pipe
- Widen Backrest or Carriage
- Cascade Side Shift
- Integrative Side Shift
- Special Attachments
- Fire Extinguisher
- Suspension Seat
- Large Capacity Battery
- Battery Charger
- Fast Battery Charger
- Mast Locking System
- Mast Top Limited System
- Finger Tip Control System
- Joy Stick
- Double Pedal
- Automatic Water Filling System
- Camera & Display
- Seat Belt Alarming Device
- Handbrake Alarming Device
- Cold Storage Type

4-wheel Battery Forklift Trucks

Standard:

- Hoppecke Battery
- ZAPI Controller
- Full AC System
- SHIMADZU Multi-way Valve Control
- 2-Stage 3m Wide View Mast
- Bar Type Forks
- Load Backrest
- Multi-Functional Safe Seat
- Seat Sensor
- Front & Rear Pneumatic Tyres
- 2nd Valve & Pipe
- NOK Hydraulic Seals
- Rearview Mirror
- Buzzer
- Electronic Horn
- Multi-Functional Combined Switch
- Emergency Switch
- Reverse Alarming Light
- Front Combined Lamp
- Rear Combined Lamp
- ZAPI-SMART Display Meter
- UN Label
- Intergral Covering
- Adjustable Steering Wheel
- Cup Holder
- Luxurious Floor Mat
- Cover Lock
- Excellent Water-Proof Componets
- Excellent Dust-Proof Componets
- Mast Intelligent Buffering System
- Self Diagnose Indicator
- Swerve & Speed Proportion Control Device
- Acceleration Curve Memory Function
- Tool Box
- Operation Manual
- Maintainance Manual
- Spare Parts Manual
- Inspection Certificate

Options:

- 2-stage Full Free Wide View Mast
- 3-stage Full Free Wide View Mast
- Solid Tyre
- No-marking Solid Tyre
- Fork Extensions
- Extended Forks
- 3rd Valve & Pipe
- 4th Valve & Pipe
- Widen Backrest or Carriage
- Cascade Side Shift
- Integrative Side Shift
- Special Attachments
- Fire Extinguisher
- Suspension Seat
- Large Capacity Battery
- Battery Charger
- Fast Battery Charger
- Mast Locking System
- Mast Top Limited System
- Finger Tip Control System
- Joy Stick
- Double Pedal
- Automatic Water Filling System
- Camera & Display
- Seat Belt Alarming Device
- Handbrake Alarming Device
- Cold Storage Type