




Warehouse Equipment

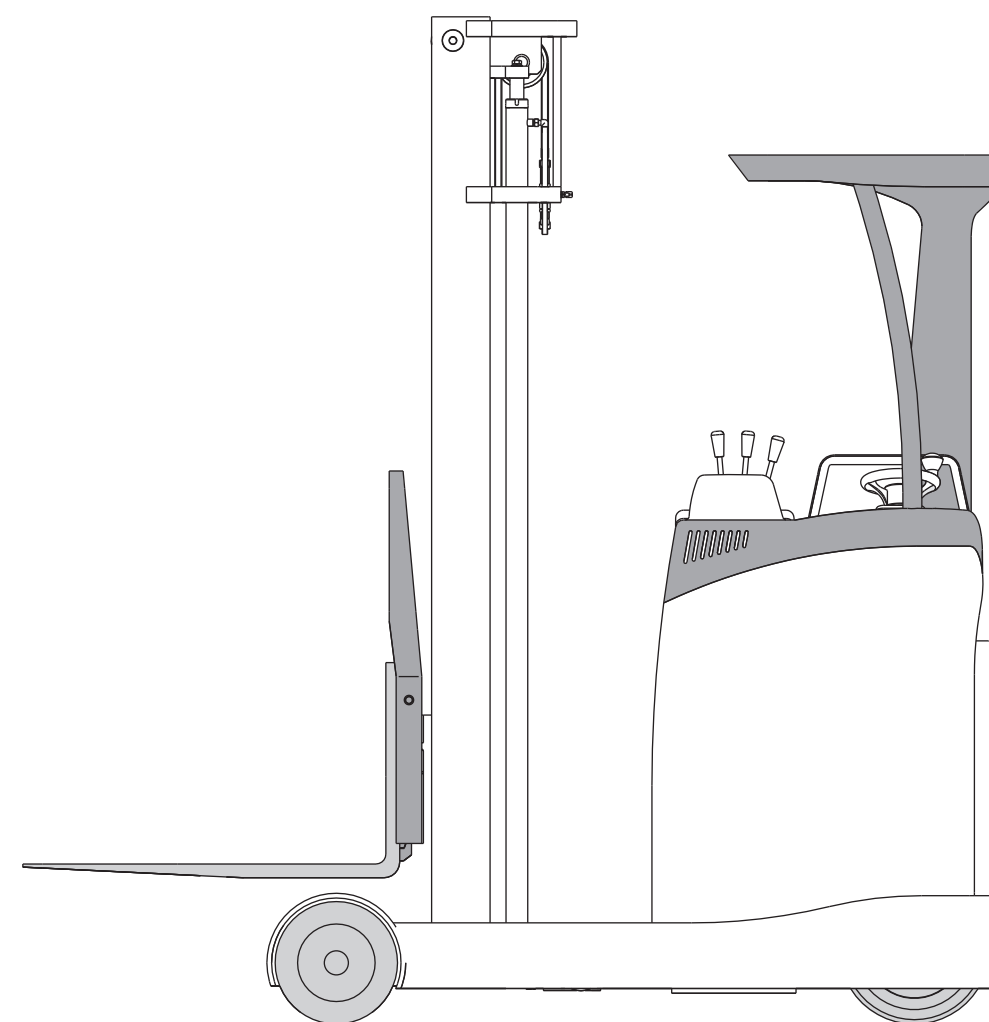

HANGZHOU ZHELI FORKLIFT GROUP CO.,LTD

Add: No.1 Xindeng Industrial Park, Fuyang City, Zhejiang
Province P.R.China

Tel: +86-571-86888355 / 86888377

Fax: +86-571-86888399

E-mail: sales@unforklift.com

Homepage: www.unforklift.com



UN.B0A00G/1




Reach Forklift Trucks(sit-on) (1.0t / 1.2t / 1.4t / 1.6t / 1.8t / 2.0t)

MAIN SPECIFICATIONS


Specification	1	Manufacturer								1		
	2	Model			FBR10-C	FBR12-C	FBR14-C	FBR16-C	FBR18-C	FBR20-C	2	
	3	Power			Battery						3	
	4	Operation			Sit-on						4	
	5	Rated Load Capacity		Q (kg)	1000	1200	1400	1600	1800	2000	5	
	6	Load Centre		C (mm)	600						6	
	7	Rated Lift Height		h3 (mm)	3000						7	
	8	Free Lift Height		h2 (mm)	190			190			8	
	9	Fork Size	L W T	mm	920 100 35			920 120 35	920 120 45		9	
	10	Fork Carriage Tilt	F/R (/)	Deg	3 /5						10	
Dimensions	11	Overall Dimensions	Overall Length	l1 (mm)	2338			2418			11	
	12		Main Body Length	l2 (mm)	1415			1495			12	
	13		Overall Width	b1 (mm)	1270						13	
	14		Mast Lowered Height	h1 (mm)	1951						14	
	15		Mast Extended Height (With Backrest)	h4 (mm)	4030			4030			15	
	16		Height to Safeguard	h5 (mm)	2220			2220			16	
	17	Turning Radius	Min.	wa (mm)	1740			1820			17	
	18	Ground Clearance	Min.	h6 (mm)	78			78			18	
	19	Reach Distance		X (mm)	480			560			19	
	20	Wheelbase		Y (mm)	1420			1500			20	
	21	Track Width	Front	b2 (mm)	1160						21	
	22	Working Aisle Width with Pallet (Ast)*	1200 1200	Ast1 (mm)	2820			2900			22	
	1000 1000		Ast2 (mm)	2620			2700			23		
Performance	24	Speed	Travel (Full Load)	km/h	9.0		8.5	9.5	9.2	8.5	24	
	25		Travel (No Load)	km/h	10.0		9.5	10.0	10.0	9.0	25	
	26		Lifting (Full Load)	mm/s	240		230	230	220	210	26	
	27	Max Gradeability	Full Load	%	>12						>10	27
	28	Total Weight	Include Battery Box	kg	2780			2900			3100	28
	29	Tyre (Polyurethane)	Front 2		310*100						29	
	30		Rear 1		343*114			343*135			30	
Drive	31	Motor	Drive Motor	kw	6						31	
	32		Lift Motor	kw	9.2			11			32	
	33	Battery	Standard	V/Ah	48/420				48/560		33	
	34	Steering System			Electronic						34	
	35	Service Brake			Electromagnetic						35	
	36	Controller	Type		AC						36	
	37		Manufacturer		ZAPI						37	

Specifications and characteristics are subject to change without notice.
Please contact us for detailed information.

UN Forklift retains the right to interpret.

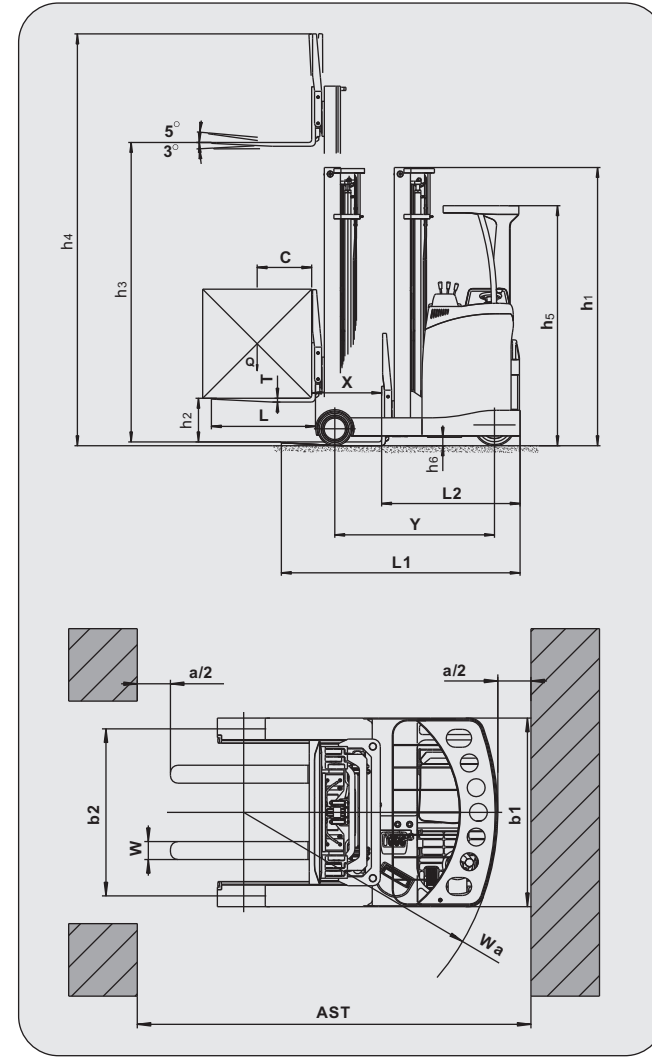

Load chart

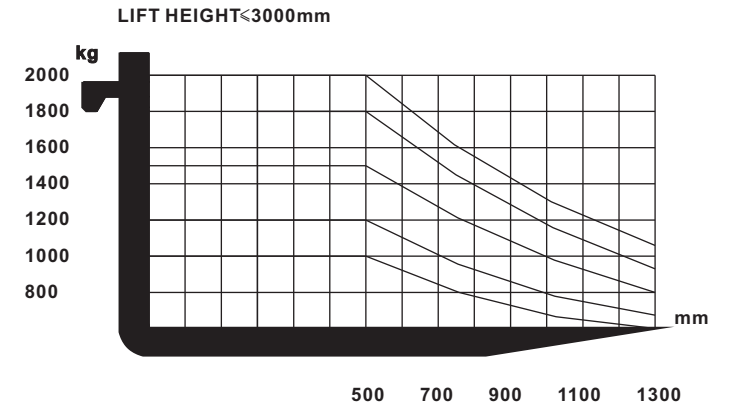

MAST SPECIFICATIONS & RATED CAPACITIES

Mast Type	Mast Name	Max. Fork Height (mm)	Load Capacity (Load Centre 600mm) (kg)							Overall Height (mm)						Free Lift (mm)				Tilt Angle (F/R)	Total Weight (kg)		
										Lowered	Extended		Lowered	Extended		Without Backrest	With Backrest	Without Backrest	With Backrest				
											Without Backrest	With Backrest		Without Backrest	With Backrest								
			1.0t	1.2t	1.4t	1.6t	1.8t	2.0t	1.0t/1.2t/1.4t		1.6t/1.8t/2.0t		1.0t/1.2t/1.4t		1.6t/1.8t/2.0t		1.0t/1.2t/1.4t	1.6t/1.8t	2.0t				
Wide View Mast	RM300	3000	1000	1200	1400	1600	1800	2000	1951	3545	4030	1951	3545	4030	190	190	190	190	3-5	2780	2900	3100	
	RM330	3300	1000	1200	1400	1600	1800	2000	2351	3845	4330	2351	3845	4330	190	190	190	190	3-5	2825	2940	3145	
	RM350	3500	1000	1200	1400	1600	1800	2000	2451	4045	4530	2451	4045	4530	190	190	190	190	3-5	2855	2970	3175	
	RM370	3700	1000	1200	1400	1600	1800	2000	2551	4245	4730	2551	4245	4730	190	190	190	190	3-5	2870	2990	3190	
	RM400	4000	1000	1200	1400	1600	1800	2000	2751	4545	5030	2751	4545	5030	190	190	190	190	3-5	2895	3015	3115	
	RM430	4300	1000	1200	1400	1600	1800	2000	2901	4845	5330	2901	4845	5330	190	190	190	190	3-5	2915	3035	3135	
	RM450	4500	1000	1200	1400	1600	1800	2000	3001	5045	5530	3001	5045	5530	190	190	190	190	3-5	2935	3050	3155	
	RM470	4700	800	1000	1200	1450	1650	1850	3100	5245	5730	3100	5245	5730	190	190	190	190	3-5	2960	3080	3180	
3-stage Full Free Wide View Mast	RTFM430	4300	1000	1200	1400	1600	1800	2000	1998	4835	5323	1998	4835	5323	1465	975	1465	975	3-5	2560	2680	2880	
	RTFM450	4500	1000	1200	1400	1600	1800	2000	2048	5023	5523	2048	5023	5523	1565	1075	1565	1075	3-5	2645	2765	2965	
	RTFM470	4700	1000	1200	1400	1600	1800	2000	2098	5223	5723	2098	5223	5723	1665	1175	1665	1175	3-5	2730	2850	3050	
	RTFM500	5000	1000	1200	1400	1600	1800	2000	2198	5523	6023	2198	5523	6023	1765	1275	1765	1275	3-5	2815	2935	3135	
	RTFM550	5500	1000	1200	1400	1600	1800	2000	2398	6023	6523	2398	6023	6523	1865	1375	1865	1375	3-5	2900	3020	3220	
	RTFM600	6000	1000	1200	1400	1600	1800	2000	2598	6523	7023	2598	6523	7023	2065	1575	2065	1575	3-5	2985	3105	3305	
	RTFM650	6500	900	1000	1100	1400	1500	1650	2748	7023	7523	2748	7023	7523	2265	1775	2265	1775	3-5	3070	3190	3390	
	RTFM700	7000	800	850	900	1150	1300	1400	2948	7523	8023	2948	7523	8023	2365	1875	2365	1875	3-5	3155	3275	3475	
	RTFM750	7500	700	750	775	1000	1150	1200	3148	8023	8523	3148	8023	8523	2565	2075	2565	2075	3-5	3240	3360	3560	
	RTFM800	8000	600	625	650	850	900	950	3323	8523	9023	3323	8523	9023	2725	2235	2725	2235	3-5	3325	3445	3640	

NOTE: With side shifter, load capacity subtract 100Kg.


Reach Forklift Trucks(stand-on) (1.3t / 1.5t / 1.8t / 2.0t / 2.5t)

MAIN SPECIFICATIONS


Specification	1	Manufacturer							1		
	2	Model		FBR13-C	FBR15-C	FBR18-C	FBR20-C	FBR25-C	2		
	3	Power		Battery					3		
	4	Operation		Stand-on					4		
	5	Rated Load Capacity	Q (kg)	1300	1500	1800	2000	2500	5		
	6	Load Centre	C (mm)	600					6		
	7	Rated Lift Height	h3 (mm)	3000					7		
	8	Free Lift Height	h2 (mm)	190			190		8		
	9	Fork Size	LxWxT	mm	920x120x35			1070x125x40		9	
	10	Fork Carriage Tilt	F/R (/)	Deg	3 / 5					10	
Dimensions	11	Overall Dimensions	Overall Length	l1 (mm)	2270			2505		11	
	12		Main Body Length	l2 (mm)	1350			1435		12	
	13		Overall Width	b1 (mm)	1090			1200		13	
	14		Mast Lowered Height	h1 (mm)	2100					14	
	15		Mast Extended Height (With Backrest)	h4 (mm)	4258					15	
	16		Height to Safeguard	h5 (mm)	2250					16	
	17	Turning Radius	Min.	wa (mm)	1700			1750	1925	17	
	18	Ground Clearance	Min.	h6 (mm)	90					18	
	19	Reach Distance	X (mm)	560			500	670		19	
	20	Wheelbase	Y (mm)	1470			1500	1680		20	
	21	Track Width	Front	b2 (mm)	1000			1085		21	
	22		Rear	b3 (mm)	575			560		22	
	23	Working Aisle Width with Pallet (Ast)*	1200x1200	Ast1 (mm)	2750			2835	2840		23
	24		1000x1000	Ast2 (mm)	2550			2635	2640		24
Performance	25	Speed	Travel (Full Load)	km/h	9.5			8.5		25	
	26		Travel (No Load)	km/h	10.0			9.0		26	
	27		Lifting (Full Load)	mm/s	240			240		27	
	28	Max Gradeability	Full Load	%	>10			>10		28	
	29	Total Weight	Include Battery Box	kg	2650			2800		29	
	30	Tyre (Polyurethane)	Frontx2		250x85			250X120		30	
	31		Rearx1		343x114					31	
	32		Balance Tyrex2		178x76					32	
Drive	33	Motor	Drive Motor	kw	4.0/6.0			6.3/6.3		33	
	34		Lift Motor	kw	7.5/9.2			8.6/11		34	
	35	Battery	Standard	V/Ah	48/375			48/450		35	
	36	Steering System			Electronic					36	
	37	Service Brake			Electronic					37	
	38	Controller	Type		AC					38	
	39		Manufacturer		ZAPI					39	

Specifications and characteristics are subject to change without notice.
Please contact us for detailed information.

UN Forklift retains the right to interpret.

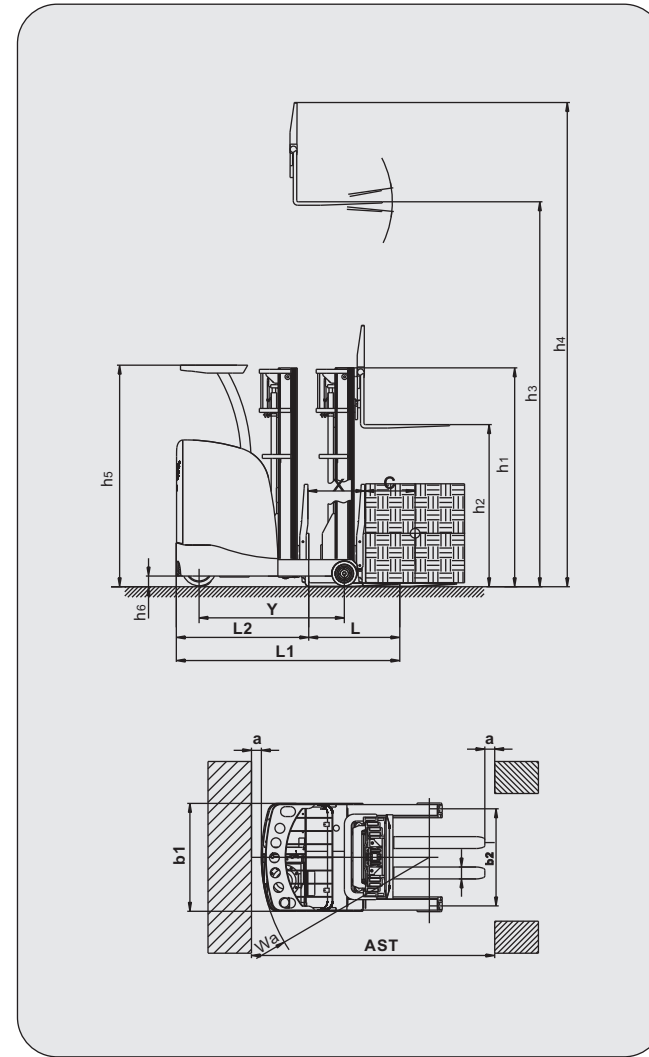

Load chart

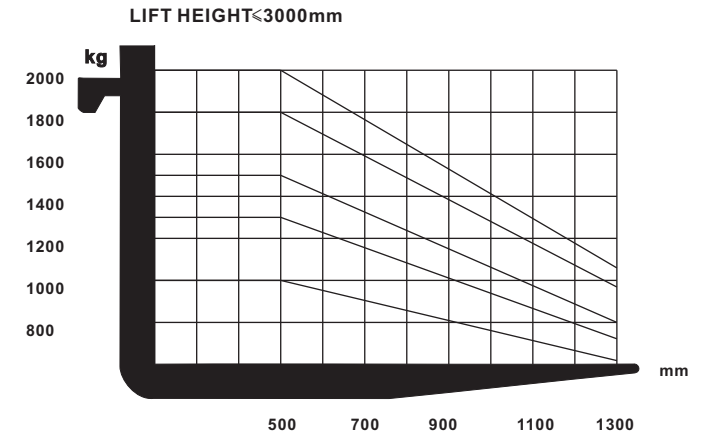

MAST SPECIFICATIONS & RATED CAPACITIES

Mast Type	Mast Name	Max. Fork Heigh (mm)	Load Capacity (Load Centre 600mm) (kg)					Overall Height (mm)						Free Lift (mm)				Tilt Angle (F/R)	Total weight (kg)	
								Lowered	Extended		Lowered	Extended		Without Backrest	With Backrest	Without Backrest	With Backrest			
									Without Backrest	With Backrest		Without Backrest	With Backrest							
			1.3t	1.5t	1.8t	2.0t	2.5t	1.3t/1.5t/1.8t		2.0t/2.5t		1.3t/1.5t/1.8t		2.0t/2.5t		1.3t/1.5t/1.8t	2.0t/2.5t			
Wide View Mast	RM300	3000	1300	1500	1800	2000	2500	2100	3868	4258	2100	3868	4258	190	190	190	190	3-5	2650	2800
	RM330	3300	1300	1500	1800	2000	2500	2395	3865	4330	2395	3865	4330	190	190	190	190	3-5	2480	2740
	RM350	3500	1300	1500	1800	2000	2500	2400	4468	4858	2400	4468	4858	190	190	190	190	3-5	2700	2850
	RM370	3700	1300	1500	1800	2000	2500	2595	4265	4730	2595	4265	4730	190	190	190	190	3-5	2600	2850
	RM400	4000	1300	1500	1800	2000	2500	2795	4565	5030	2795	4565	5030	190	190	190	190	3-5	2650	2900
	RM430	4300	1300	1500	1700	2000	2400	2700	5068	5458	2700	5068	5458	190	190	190	190	3-5	2750	2900
	RM450	4500	1300	1500	1600	2000	2300	3045	5065	5530	3045	5065	5530	190	190	190	190	3-5	2810	3020
	RM470	4700	1200	1400	1500	1900	2200	3145	5265	5730	3145	5265	5730	190	190	190	190	3-5	2900	3080
3-stage Full Free Wide View Mast	RTFM430	4300	1300	1500	1650	2200	2200	2055	4960	5340	2055	4960	5340	1960	2430	1960	2430	3-5	2450	2500
	RTFM450	4500	1300	1500	1550	2100	2100	2105	5110	5540	2105	5110	5540	2060	2530	2060	2530	3-5	2550	2600
	RTFM470	4700	1300	1450	1450	1950	1950	2155	5270	5740	2155	5270	5740	2160	2630	2160	2630	3-5	2700	2650
	RTFM500	5000	1300	1380	1380	1700	1700	2203	5575	6030	2206	5565	6030	1631	1176	1631	1176	3-5	2900	3150
	RTFM550	5500	1300	1300	1300	1600	1600	2403	6075	6530	2406	6065	6530	1731	1276	1731	1276	3-5	3050	3250
	RTFM600	6000	1200	1200	1200	1500	1500	2603	6575	7030	2606	6565	7030	1931	1476	1931	1476	3-5	3200	3350
	RTFM650	6500	1050	1050	1050	1250	1250	2753	7075	7530	2756	7065	7530	2131	1676	2131	1676	3-5	3400	3500
	RTFM700	7000	700	700	700	900	900	2953	7575	8030	2956	7565	8030	2231	1776	2231	1776	3-5	3450	3600
	RTFM750	7500	600	600	600	800	800	3153	8075	8530	3156	8065	8530	2431	1976	2431	1976	3-5	3550	3700
	RTFM800	8000	500	500	500	750	750	3318	8575	9030	3321	8565	9030	2631	2146	2631	2146	3-5	3650	3800

NOTE: With side shifter, load capacity subtract 100Kg.




Narrow Aisle Forklift Trucks(VNA) (1.0t)

MAIN SPECIFICATIONS

Specification	1	Manufacturer			1
	2	Model		FBAP10	2
	3	Power		Battery	3
	4	Operation		Sit-on	4
	5	Rated Load Capacity		1000	5
	6	Load Centre	C (mm)	600	6
	7	Rated Lift Height	h3 (mm)	3000	7
	8	Fork Size	L W T	mm	920 120 35
Dimensions	9	Overall Dimensions	Overall Length	l1 (mm)	4250/3615
	10		Overall Width	b1 (mm)	1580
	11		Mast Lowered Height	h1 (mm)	2250
	12		Mast Extended Height (With Backrest)	h4 (mm)	3996
	13		Height to Safeguard	h5 (mm)	2220
	14	Turning Radius	Min.	wa (mm)	2270
	15	Ground Clearance	Min.	h6 (mm)	60
	16	Side Shifter (max./min.)	X (mm)	1340/1290	
	17	Fork Side Time	s	8	
	18	Fork Rotation Angle	Deg	180	
	19	Fork Rotation Time	s	8	
	20	Wheelbase	b2 (mm)	1950	
Performance	21	Piled Passageway Width	(mm)	1700	
	22	Speed	Max.Turning (Full Load)	km/h	9
	23		Max.Turning (No Load)	km/h	9.5
	24		Lifting (Full Load)	mm/s	220
	25		Lifting (No Load)	mm/s	250
	26	Max Gradeability	Full Load	%	>10
	27	Total Weight	Include Battery Box	kg	4950
	28	Tyre (Polyurethane)	Front 2		250 110 4
	29		Rear 1		343 135
Drive	30	Motor	Drive Motor	kw	6
	31		Lift Motor	kw	11
	32	Battery	Standard	V/Ah	48/840
	33	Steering System		Electronic	
	34	Service Brake		Electromagnetic	
	35	Height Control		Automatic	
	36	Controller	Type	AC	
	37		Manufacturer	ZAPI	

Specifications and characteristics are subject to change without notice.
Please contact us for detailed information.

UN Forklift retains the right to interpret.

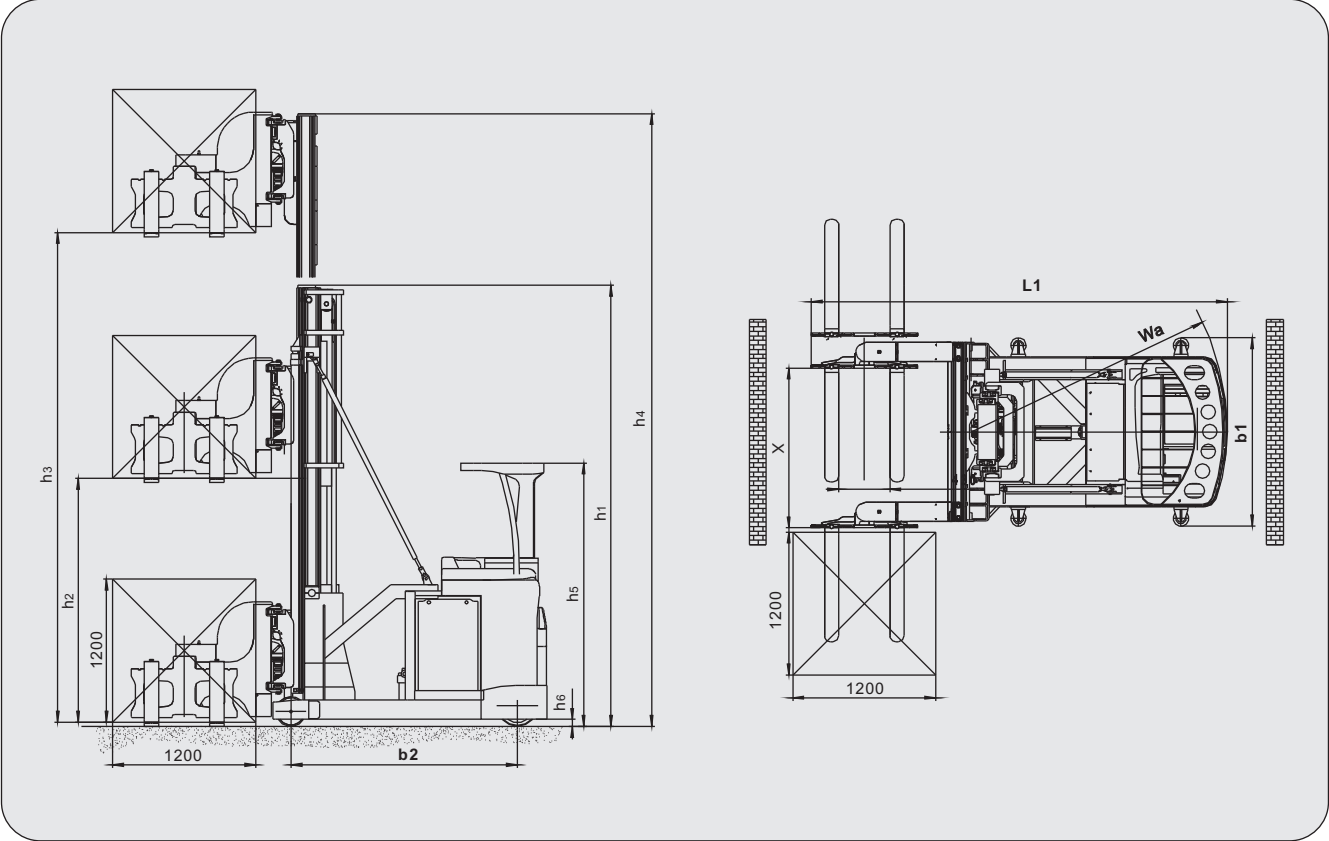

MAST SPECIFICATIONS & RATED CAPACITIES


Mast Type	Mast Name	Max. Fork Height (mm)	Load Capacity (Load Centre 600mm) (kg)	Overall Height (mm)			Free Lift (mm)		Total Weight (kg)
				Lowered	Extended		Without Backrest	With Backrest	
					Without Backrest	With Backrest			
						1.0t	1.0t		
3-stage Full Free Wide View Mast	VTFM400	4000	1000	2346	5032.5	5046	1331	1381.5	5120
	VTFM500	5000	1000	2680	6032.5	6046	1663	1713.5	5240
	VTFM600	6000	1000	3034	7032.5	7046	1995	2045.5	5360
	VTFM700	7000	900	3368	8032.5	8046	2161	2211.5	5480
	VTFM800	8000	800	3700	9032.5	9046	2329	2380	5600
	VTFM900	9000	700	4034	10032.5	10046	2495	2545.5	5730
	VTFM1000	10000	600	4368	11032.5	11046	2695	2745.5	5840

Electric Stacker (1.0t / 1.2t / 1.4t / 1.6t)

MAIN SPECIFICATIONS

Specification	1	Manufacturer							1
	2	Model			PS 10	PS12	PS14	PS16	2
	3	Power			Battery				3
	4	Operation			Pedestrian				4
	5	Rated Load Capacity		Q (kg)	1000	1200	1400	1600	5
	6	Load Centre		C (mm)	600				6
	7	Rated Lift Height		h3(mm)	3000				7
	8	Fork Dimensions		l/e/s(mm)	1150x180x60				8
Dimensions	9	Overall Dimensions	Length	L1(mm)	2020				9
	10		Length to Fork Face	L2(mm)	870				10
	11		Width	b1/b2	800				11
	12		Height When Mast Lowered	h1(mm)	1990				12
	13		Fork Height When Mast Lowered	h13(mm)	85				13
	14		Height When Mast Extended	h4(mm)	3545				14
	15	Tiller Height, Travel Position min./max		h14(mm)	970/1280				15
	16	Fork Carriage Width		b3(mm)	800				16
	17	Turning Radius		Wa(mm)	1620/2060				17
	18	Overhang		x (mm)	728				18
	19	Ground Clearance, Center of Wheelbase		m2(mm)	25				19
	20	Wheelbase		y(mm)	1345				20
	21	Width Over Forks		b5(mm)	560				21
	22	Working Asile Width with Pallet	1000x1200mmCrossways	Ast(mm)	2480/2920				22
	23		800x1200mmLengthways	Ast(mm)	2440/2875				23
Performance	24	Speed	Travel (Full Load)	km/h	5.0				24
	25		Travel (No Load)	km/h	5.5				25
	26		Lifting(Full Load)	m/s	97				26
	27		Lifting(No Load)	m/s	164				27
	28		Lowering(Full Load)	m/s	300	300	128	128	28
	29		Lowering(No Load)	m/s	200	200	120	120	29
	30	Gradeability	Full Load	%	6				30
	31		No Load	%	10				31
	32	Service Brake		Type	Electromagnetic				32
	33	Wheel	Material		Polyurethane				33
	34		Size, Drive Wheel	mm	Φ230X70				34
	35		Size, Load Wheels	mm	Φ85X85				35
	36		Size, Auxiliary Wheel	mm	Φ152X70				36
	37		Number, Front/Rear	X=Drive	1X+1/4				37
	38	Track Wdith, Drive		mm	490				38
	39	Track Wdith, Load Wheel		mm	500				39
	40	Axle Loading - Full Load, Drive / Load Wheel		kg	635/12 20	635/1220	860/1790	860/1790	40
	41	Axle Loading -No Load, Drive / Load Wheel		kg	605/25 0	605/250	735/315	735/315	41
	42	Sound Level at Driver's Ear		dB(A)	65				42
	43	Service Weight			1000				43
Drive	44	Motor	Drive Motor Output (60min.Rating)	kw	1.2	1.2	1.5	1.5	44
	45		Lift Motor Output (15% Rating)	kw	2.2	2.2	3.0	3.0	45
	46	Battery (IEC)			3PzB				46
	47	Battery Voltage/Capacity		V/Ah	24/225				47
	48	Battery Weight		kg	220				48
	49	Controller	Type		AC				49
	50		Manufacturer		ZAPI				50

Specifications and characteristics are subject to change without notice. UN Forklift retains the right to interpret. Please contact us for detailed information.

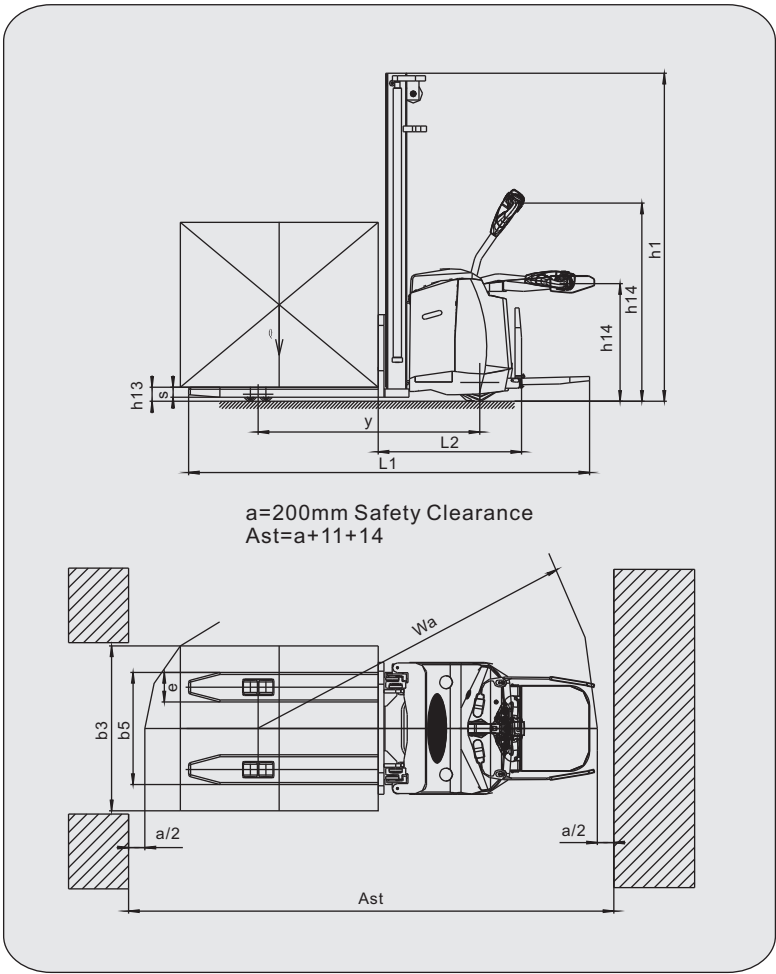

MAST SPECIFICATIONS & RATED CAPACITIES

Mast Type	Mast Name	Max. Fork Height (mm)	Load Capacity (Load Centre 600mm) (kg)				Overall Height (mm)		Free Lift (mm)	Total Weight (kg)
							Lowered	Extended	With Backrest	
			1.0t	1.2t	1.4t	1.6t		1.0t/1.2t/1.4t/1.6t		
Wide View Mast	RM300	3000	900	1050	1200	1300	1990	3545	-	1000
	RM330	3300	750	950	1100	1200	2135	3845	-	1050
	RM350	3500	650	830	950	1030	2185	4045	-	1100
	RM370	3700	590	770	900	1000	2385	4645	-	1150
	RM400	4000	480	580	750	900	2485	4545	-	1200
	RM450	4500	350	450	550	700	2735	5045	-	1300
	RM500	5000	-	-	450	500	3035	5545	-	1350
3-stage Full Free Wide View Mast	VTFM430	4300	350	430	570	700	2040	4940	1940	1420
	VTFM450	4500	280	350	500	600	2090	5100	2040	1450
	VTFM470	4700	200	250	420	500	2140	5250	2140	1480
	VTFM500	5000	100	150	350	400	2240	5550	2240	1510
	VTFM550	5500	-	-	180	200	2440	6140	2340	1570


Electric Pallet Truck (1.0t / 1.5t / 2.0t / 2.5t / 3.0t)

MAIN SPECIFICATIONS

Specification	1	Manufacturer								1
	2	Model			J10	J15	J20	J25	J30	2
	3	Power			Battery					3
	4	Operation			Pedestrian					4
	5	Rated Load Capacity	Q (kg)	1000	1500	2000	2500	3000	5	
	6	Load Centre	C (mm)	600					6	
	7	Fork Dimensions	l/e/s(mm)	1150x180x55					7	
Dimensions	8	Overall Dimensions	Length	L(mm)	1968					8
	9		Length to Fork Face	L2(mm)	870					9
	10		Width	B(mm)	730					10
	11	Rated Lift Height	H(mm)	120					11	
	12	Fork Height, Lowered	H1(mm)	85					12	
	13	Fork Height, Raised	H2(mm)	205					13	
	14	Width Over Forks	B1(mm)	540					14	
	15	Height of Rider Platform	H3(mm)	140					15	
	16	Tiller Height, Travel Position min./max	H4(mm)	970/1280					16	
	17	Turning Radius	Wa(mm)	1620/2060					17	
18	Overhang	x (mm)	728					18		
Performance	19	Working Aisle Width with Pallet	1000X1200mm Crossways	Ast(mm)	2450/2890					19
	20		800X1200mm Lengthways	Ast(mm)	2570/3010					20
	21	Speed	Travel (Full Load)	km/h	5					21
	22		Travel (No Load)	km/h	8					22
	23		Lifting (Full Load)	mm/s	56					23
	24		Lifting (No Load)	mm/s	60					24
	25		Lowering (Full Load)	mm/s	59					25
	26		Lowering (No Load)	mm/s	57					26
	27	Gradeability	Full Load	%	5					27
	28		No Load	%	7					28
	29	Service Brake		Type	Electromagnetic					29
	30	Wheels	Material		Polyurethane					30
31	Number of Wheel			1*D+1*D1+4*D2					31	
32	Size, Drive Wheel		D(mm)	Φ 230X70					32	
33	Size, Load Wheels		D2(mm)	Φ 85X60					33	
34	Size, Auxiliary Wheel		D1(mm)	Φ 152X70					34	
35	Wheelbase	Y(mm)	1442		1495			35		
36	Track Width, Drive	mm	420					36		
37	Track Width, Load Wheel	mm	360					37		
38	Sound Level at Driver's Ear	dB(A)	65					38		
39	Service Weight without Battery	kg	440	440	512	512	512	39		
40	Service Weight with Battery	kg	640	640	712	712	712	40		
Drive	41	Motor	Drive Motor Output (60min.rating)	kw	1.2		1.5		41	
	42		Lift Motor Output (15% rating)	kw	0.8		2.2		42	
	43	Battery (IEC)			3HPzB					43
	44	Battery Voltage/Capacity		V/Ah	24/195					44
	45	Battery Weight		kg	200					45
	46	Controller	Type		AC					46
	47		Manufacturer		ZAPI					47

Specifications and characteristics are subject to change without notice.
Please contact us for detailed information.

UN Forklift retains the right to interpret.

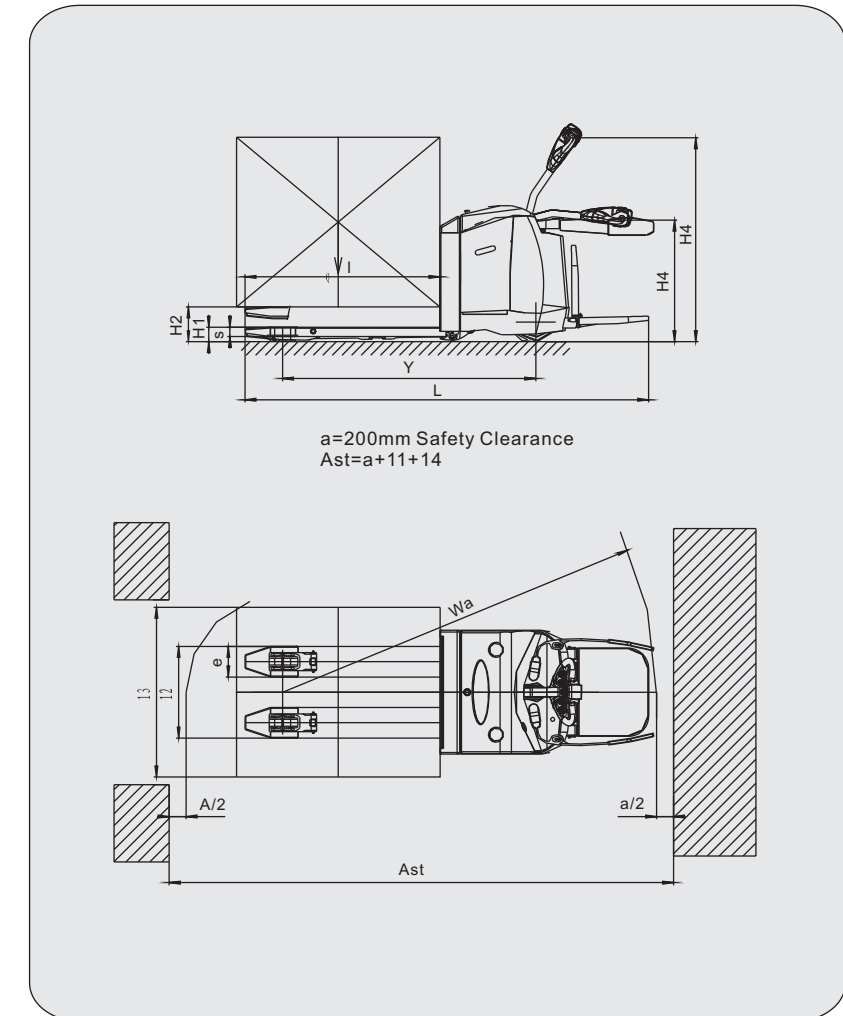

Reach Truck(sit-on)

Standard:

- Hoppecke Battery
- ZAPI Controller
- Full AC System
- SHIMADZU Mutli-Way Valve
- Superb Low Noise Motor
- 2-Stage 3m Wide View Mast
- Bar Type Forks
- Load Backrest
- Overhead Guard
- Multi-Functional Safe Seat
- Storage Box
- Grab Handle
- Head Impact-Relief Protection
- Polyurethane Tyres
- 3rd Valve & Pipe
- NOK Hydraulic Seals
- Rearview Mirror
- Buzzer
- Electric Horn
- Multi-Functional Combined Switch
- Emergency Switch
- Reverse Alarming Lamp
- Front Combined Lamp
- ZAPI- SMART Display Meter
- UN Label
- Integral Covering
- Adjustable Steering Wheel
- Cup Holder
- Luxurious Floor Mat
- Mast Intelligent Buffering System
- Front-Way Battery Change
- Side-Way Battery Change
- Tilting Fork
- Electronic Power Steering System
- Electromagnetic Brake System
- Swerve Speed Proportion Control Device
- Brake Energy Saving Device
- Steering Wheel Automatic Return Function
- Deadman Pedal
- Brake Pedal
- Accelerating Pedal
- Tool Box
- Operation Manual
- Maintenance Manual
- Spare Parts Manual
- Inspection Certification

Options:

- 2-stage Full Free Wide View Mast
- 3-stage Full Free Wide View Mast
- Fork Extensions
- Extended Forks
- 4th Valve & Pipe
- Side Shifter
- Fire Extinguisher
- Suspension Seat
- Large Capacity Battery
- Battery Charger
- Fast Battery Charger
- Mast Self Lock System
- Mast Top Limited System
- Finger tip control system
- Joy Stick
- Automatic Water Filling System
- Camera and Display
- Seat Belt Alarming Device
- Cold Storage Type

Reach Truck(stand-on)

Standard:

- Hoppecke Battery
- ZAPI Controller
- Full AC System
- SHIMADZU Mutli-Way Valve
- Superb Low Noise Motor
- 2-Stage 3m Wide View Mast
- Bar Type Forks
- Load Backrest
- Overhead Guard
- Multi-Functional Safe Seat
- Grab Handle
- Head Impact-Relief Protection
- Polyurethane Tyres
- 3rd Valve & Pipe
- NOK Hydraulic Seals
- Rearview Mirror
- Buzzer
- Electric Horn
- Multi-Functional Combined Switch
- Emergency Switch
- Reverse Alarming Lamp
- Front Combined Lamp
- ZAPI- SMART Display Meter
- UN Label
- Integral Covering
- Adjustable Steering Wheel
- Cup Holder
- Luxurious Floor Mat
- Mast Intelligent Buffering System
- Front-Way Battery Change
- Tilting Fork
- Electronic Power Steering System
- Electronic Brake System
- Swerve Speed Proportion Control Device
- Brake Energy Saving Device
- Steering Wheel Automatic Return Function
- Deadman Pedal
- Brake Pedal
- Accelerating Pedal
- Tool Box
- Operation Manual
- Maintenance Manual
- Spare Parts Manual
- Inspection Certification

Options:

- 2-Stage Full Free Wide View Mast
- 3-Stage Full Free Wide View Mast
- Fork Extensions
- Extended Forks
- 4th Valve & Pipe
- Side Shifter
- Fire Extinguisher
- Large Capacity Battery
- Battery Charger
- Fast Battery Charger
- Back Rest
- Suspension Floor Mat
- Mast Self Lock System
- Mast Top Limited System
- Finger tip control system
- Joy Stick
- Automatic Water Filling System
- Camera and Display
- Cold Storage Type



Electric Stacker

Standard:

- UN Battery
- ZAPI Controller
- Full AC System
- Stand Motor
- Hydr-app Pump Station
- 2-stage 3m Wide View Mast
- Mast Intelligent Buffering System
- REMA Handle
- Electric Brake System
- Overload Prevent Valve
- Emergency Switch
- Plexiglass Defend
- Load Backrest
- Electric Horn
- Hour Meter
- Side-way Batter Change
- NOK Hydraulic Seals
- Polyurethane Wheels
- Auxiliary Wheels
- Tool Box
- Operation Manual
- Maintenance Manual
- Spare Parts Manual
- Inspection Certification

Options:

- Hoppecke Battery
- Battery Charger
- Large Capacity Battery
- 2-stage Full Free Wide View Mast
- 3-stage Full Free Wide View Mast
- Mast Top Limited Device
- Intelligent Speed Control Device
- Automatic Water Filling System
- Rider Platform
- Arm Protection
- Intelligent Display
- Supporting Stand wheels
- Suspension Pedal

Electric Pallet Truck

Standard:

- UN Battery
- ZAPI Controller
- Full AC System
- Stand Motor
- Fork and Battery Separate Design
- Hydr-app Pump Station
- Intelligent Speed Control Device
- REMA Handle
- Electromagnetic Braking System
- Overload Prevent Valve
- Emergency Switch
- Load Backrest
- Electric Horn
- Hour Meter
- Side-way Batter Change
- NOK Hydraulic Seals
- Polyurethane Wheels
- Auxiliary Wheels
- Tool Box
- Operation Manual
- Maintenance Manual
- Spare Parts Manual
- Inspection Certification

Options:

- Hoppecke Battery
- Battery Charger
- Large Capacity Battery
- Automatic Water Filling System
- Rider Platform
- Arm Protection
- Intelligent Display
- Suspension Pedal

Narrow Aisle Forklift Trucks(VNA)

Standard:

- Hoppecke Battery
- ZAPI Controller
- Full AC System
- SHIMADZU Mutli-Way Valve
- Superb Low Noise Motor
- 2-Stage 3m Wide View Mast
- Bar Type Forks
- Load Backrest
- Overhead Guard
- Multi-Functional Safe Seat
- Storage Box
- Grab Handle
- Head Impact-Relief Protection
- Polyurethane Tyres
- 3rd Valve & Pipe
- NOK Hydraulic Seals
- Rearview Mirror
- Buzzer
- Electric Horn
- Multi-Functional Combined Switch
- Emergency Switch
- Reverse Alarming Lamp
- Front Combined Lamp
- ZAPI- SMART Display Meter
- UN Label
- Integral Covering
- Adjustable Steering Wheel
- Cup Holder
- Luxurious Floor Mat
- Mast Intelligent Buffering System
- Side-Way Battery Change
- Tilting Fork
- Electronic Power Steering System
- Electromagnetic Brake System
- Swerve Speed Proportion Control Device
- Steering Wheel Automatic Return Function
- Deadman Pedal
- Brake Pedal
- Accelerating Pedal
- Guiding Wheels
- Turret Head Fork System
- Lifting Height Fixing Device
- Finger Tip Control System
- Camera&LCD Screen
- Tool Box
- Operation Manual
- Maintenance Manual
- Spare Parts Manual
- Inspection Certification

Options:

- 3-Stage Full Free Wide View Mast
- Fork Extensions
- Extended Forks
- 4th Valve & Pipe
- Side Shifter
- Fire Extinguisher
- Suspension Seat
- Large Capacity Battery
- Battery Charger
- Fast Battery Charger
- Mast Self Lock System
- Mast Top Limited System
- Finger tip control system
- Joy Stick
- Automatic Water Filling System
- Seat Belt Alarming Device
- Cold Storage Type
- Aisle Automatic Guiding Function
- Aisle Terminal Decelerate and Alarm Function
- Setting Storing Depth
- Driving Speed Control By Mast Height